


Accessories

ENS-S 8200



General Data

Operating condition - door open	0 Ω (contact closed)
Operating condition - door closed	8k2 Ω
Operating condition - internal fault	∞
Safety properties	DIN EN 12453:2017-11 and DIN EN ISO 13349-1:2016-06
Protection level	IP 68
Operating temperature	-15°C to +65°C
Voltage range	24 VAC/DC
Contact load capacity	max. 0.12 VA
Max. current	5 mA
Max. switching distance	4 mm
Installation diameter	13,5 mm
Fitting depth	15 mm (magnet), 25 mm (switch)
Faceplate size	18.5 x 37.5 x 3 mm (H x W x D)
Mounting	Each part 2 x M4 flat head screw
Cable length	5 m
Housing colour	Grey

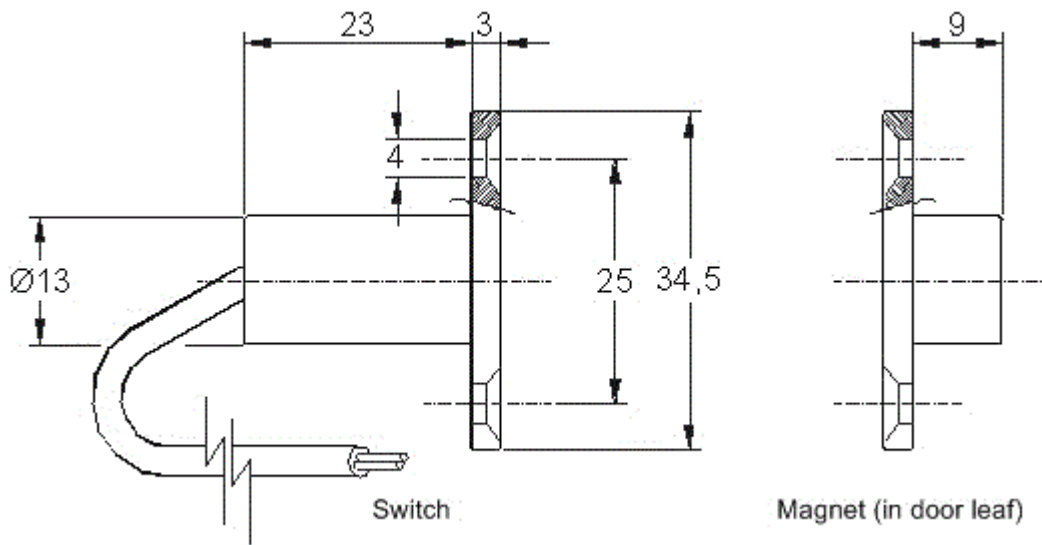

Contact



CEDES AG
sales@cedes.com

All dimension in [inch] mm. This drawing and the information contained is for general presentation purposes only. Please refer to the "Download" section for detailed technical drawings. © CEDES AG. All rights reserved. We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.